

MINIBAR

PERMANENT MOUNT



RED: To +VDC (fuse @ 8A)

BLACK: To Chassis Ground (-)

WHITE: For Warning Mode 2

· Apply +VDC to WHITE wire to activate Warning Mode 2

YELLOW: Flash patterns & Synchronization

· Momentarily apply +VDC to YELLOW for Flash Pattern change

· Continuously apply +VDC to YELLOW for Low Power

· Connect YELLOW wires of all minibars together for synchronization; all units must be set at the same pattern

WARNING: Do not look directly into LEDs while in operation; may cause momentary blindness and/or eye damage.

FLASH PATTERNS


Momentarily apply +VDC to **YELLOW**:

- Once for next pattern
- Quickly 3 times for reset to FP#0

FP#	FLASH PATTERNS
0	Random (all)
1	Single (split)
2	Double (split)
3	Quad (split)
4	Quint (split)
5	Mega (split)
6	Ultra (split)
7	Single-Quad (split)
8	Single H/L (split)
9	Single (all)
10	Double (all)
11	Quad (all)
12	Quint (all)
13	Mega (all)
14	Ultra (all)
15	Single-Quad (all)
16	Single H/L (all)
17	Steady 2 (california)
18	Steady 4 (all)

- NOTE:**
1. Different Flash Pattern can be selected and kept in memory in Warning Mode.
 2. This unit may not be factory set at FP#0.

4-Bolt Mount Brackets

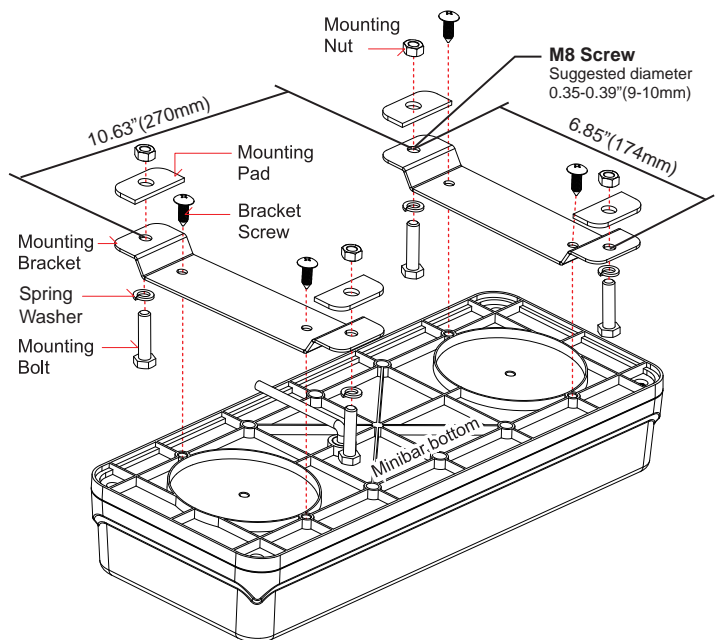

2-Bolt Mount Brackets

