


MINI BAR G6 FRESNEL series

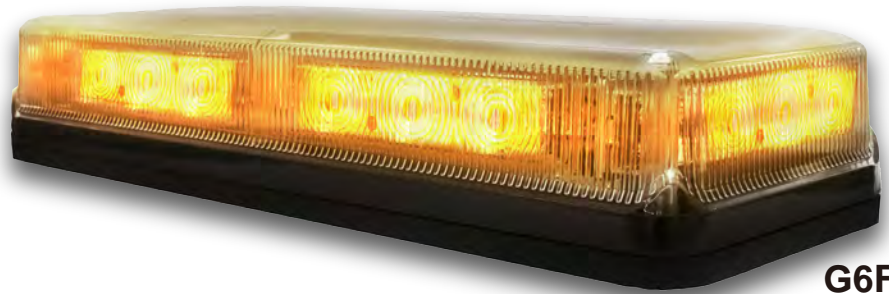

G6F

FEATURES

- Multi-Voltage Input 12VDC.
- High Intensity 1W LED x 18pcs.
- Built-in 19 Selectable Flash Patterns.
- LEDs rated to 100,000 hours of operation.
- Non-volatile memory recalls last flash pattern used at power up.
- 2 Warning Modes for quick pattern change.
- Multiple units are synchronizable.
- Weatherproof and vibration resistant design for internal or external use.
- Reverse polarity protection.

SPECIFICATIONS

Approval: SAE J845 Class 1

Bulb: 1W LED x 18pcs

Warning Patterns: 19 Flash Patterns

Operating Voltage: 12 VDC

Avg. Current: :1.5A @12VDC (varies with flash pattern)

Avg. Power: 18 Watts (varies with flash pattern)

Max. Current: 3.0A @12VDC

Max. Power: 36 Watts




Wires: Red-Vcc: 30cm (16AWG)
Black-GND: 30cm (16AWG)
Yellow-Flash Patterns & Sync: 30cm (20AWG)
White-Warning Mode 2: 30cm (20AWG)

Fuse Recommended: 5 Amps

Multi-Unit Synchronization: Over 15 units

Colors Available: Amber

DIMENSIONS

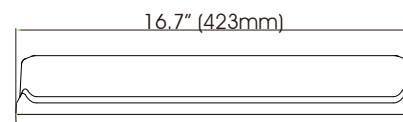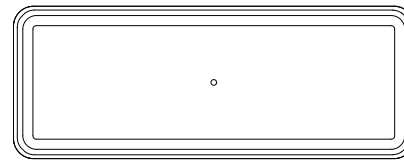

MOUNTING OPTIONS

- **G6MBB4** 4-Bolts Mount
- **G6MBC4** 4-Magnets Mount
- **G6MBC2** 2-Suction Magnets Mount

FLASH PATTERN

FP#	Flash Patterns	
0	Random	10 Double (all)
1	Single (split)	11 Quad (all)
2	Double (split)	12 Quint (all) [SAE]
3	Quad (split)	13 Mega (all)
4	Quint (split)	14 Ultra (all) [SAE]
5	Mega (split)	15 Single-Quad (all)
6	Ultra (split)	16 Single H/L (all)
7	Single-Quad (split)	17 Steady 2 (california)
8	Single H/L (split)	18 Steady 4 (all)
9	Single (all) [SAE]	

*SPLIT= Left alternate Right *ALL=all LEDs on