

MINI BAR G6 D-FUSER series



G6D-D3

FEATURES

- Multi-Voltage Input 12-24VDC.
- High Intensity 1W LED x 36pcs.
- Built-in 19 Selectable Flash Patterns.
- LEDs rated to 100,000 hours of operation.
- Non-volatile memory recalls last flash pattern used at power up.
- 2 Warning Modes for quick pattern change.
- Multiple units are synchronizable.
- Weatherproof and vibration resistant design for internal or external use.
- Reverse polarity protection.

SPECIFICATIONS

Approval: SAE J845 Class 1

Bulb: 1W LED x 36pcs

Warning Patterns: 19 Flash Patterns

Operating Voltage: 12-24 VDC

Avg. Current: AMBER/RED : 1.7A @13.5VDC / 1.1A @24VDC
BLUE/WHITE : 2.5A @13.5VDC / 1.4A @24VDC

Avg. Power: AMBER/RED : 27 Watts
BLUE/WHITE : 34 Watts

Max. Current: AMBER/RED : 3.4A @13.5VDC / 2.2A @24VDC
BLUE/WHITE : 5A @13.5VDC / 2.8A @24VDC

Max. Power: AMBER/RED : 53 Watts
BLUE/WHITE : 68 Watts




Wires: Red-Vcc: 30cm (16AWG)
Black-GND : 30cm (16AWG)
Yellow-Flash Patterns & Sync : 30cm (20AWG)
White-Warning Mode 2 : 30cm (20AWG)

Fuse Recommended: 8 Amps

Multi-Unit Synchronization: Over 15 units

Colors Available: Amber, Red, Blue, White

DIMENSIONS

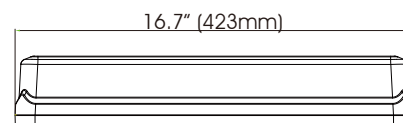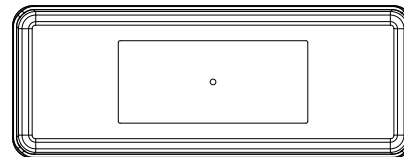

MOUNTING OPTIONS

- **G6MBB4** 4-Bolts Mount
- **G6MBC4** 4-Magnets Mount
- **G6MBC2** 2-Suction Magnets Mount

FLASH PATTERN

FP#	Flash Patterns		
0	Random	10	Double (all)
1	Single (split)	11	Quad (all)
2	Double (split)	12	Quint (all)
3	Quad (split)	13	Mega (all)
4	Quint (split)	14	Ultra (all)
5	Mega (split)	15	Single-Quad (all)
6	Ultra (split)	16	Single H/L (all)
7	Single-Quad (split)	17	Steady 2 (california)
8	Single H/L (split)	18	Steady 4 (all)
9	Single (all)		

*SPLIT= Left alternate Right *ALL=all LEDs on