

TORRENT R65 LED LIGHTBAR 49"



■ **Ship weight:**

N.W.: 17kg

G.W.: 18kg

Cuft.: 4.6'

FEATURES

- New improved Xtreme Optic with ECE R65 certified performance.
- Integrated Take-down Light and Alley Light options.
- Tough solid Aluminium body for best durability and heat dissipation.
- Programmable flash patterns, with optional Traffic Arrow and Stop/Tail/Turn function.
- Highly customizable software.
- ECE R10 EMC Compliance.
- Reverse polarity protection.

SPECIFICATIONS

Approvals: ECE R65(TB2, TA1), ECE R10, SAE Class 1, CA Title 13
Warning Patterns Set: 3 Mode w/ 14 selectable Flash Pattern Sets each

Lighthouse Programmable Flash Pattern: 21 Patterns

Traffic Patterns: 11 Flash Patterns

Operating Voltage: 12VDC or 24VDC

Avg. Current: 12.2A @12.8VDC
5.7A @25.6VDC

Max. Current: 24.3A @12.8VDC
11.4A @25.6VDC

Cable Length: Power Cable: 18 feet (5.55m) / 14AWG x 4 wires
Function Cable: 18.8 feet (5.75m) / 22AWG x 16 wires


Storage Temperature: -40°C to + 75°C

Operating Temperature: -30°C to + 65°C


Recommended Fuse: 40A @12VDC
20A @24VDC

Available Colour in: Amber, Blue

DIMENSIONS

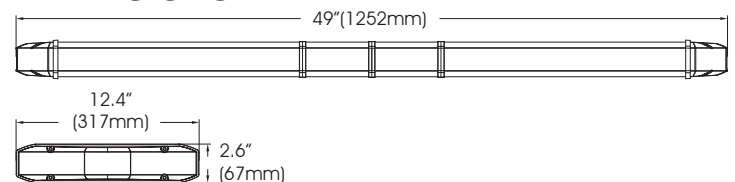

CONFIGURATION

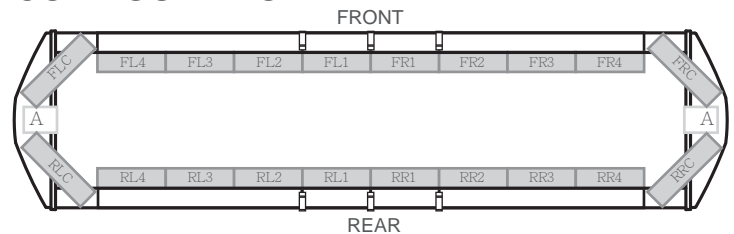

MOUNTING OPTIONS

97.LLG00D.00
Standard Bolt Mount Brackets



TMBA
Adjustable Bolt Mount Brackets



TMBF
Flat Surface Mount Brackets Small



TMBG
Flat Surface Mount Brackets Large

