

R⁶esponder Series

LED Scenelight / Illumination Lighthead



FEATURES

- 3036 lm powerful LED scenelight for vehicle illumination.
- Reverse polarity protection.
- Weatherproof IPx7 rating with vibration resistant design for internal or external use.
- Solid aluminium base for efficient heat dissipation.
- Optional Chrome or Black flanges.
- ECE R10 EMC Compliance.

SPECIFICATIONS

Compliance:

Photometric- KKK 1822F; AMD024

EMC- ECE R10; CISPR 25

IP Code- IPx7

Light Source: High-power LED x 12 pcs

Raw Lumen: 3036 lm

Effective Lumen: 1060 lm

Operation Voltage: 12-24VDC

Average Current (A): 1.20A@12VDC ; 0.61A@24VDC

Average Power (W): 14.64

Max. Current (A): 1.8A@12VDC ; 0.92A@24VDC

Max. Power (W): 21.96

Wires:

Red-Vcc Activation: 25cm (20AWG)

Black-GND : 25cm (20AWG)

Fuse Rating (A): 2.0

Storage Temp. (°C): -40° ~ +75°

Working Temp. (°C): -30° ~ +65°


LED Colour: White

Lens Colour: Clear


Warranty: 5 Years

DIMENSIONS

Surface mount w/o flange bezel

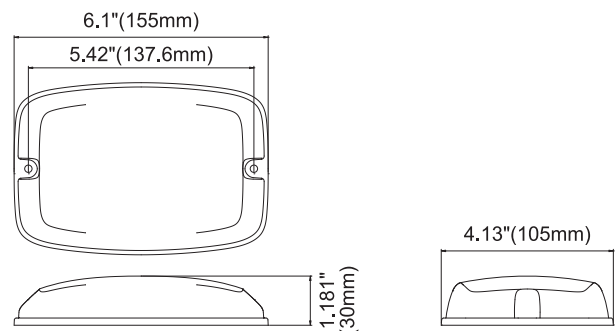

Surface mount w/ flange bezel

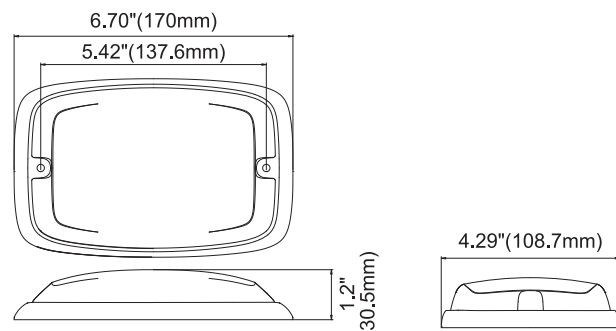

PART NO.

Scenelight / Illumination Lighthead:

M064-1303W-00R (ECE R10);

M064-1003W-00R

Accessories:

99-M064M02-000 (R6 Flange Bezel, Chrome);

99-M064M03-000 (R6 Flange Bezel, Black);