

FALO3 All In One FIT-A-LIGHT 3-LED System



FEATURES

- 17mm (0.67") Super low-profile thickness.
- Internal installation in vehicle lamp with 1" cut-out.
- External surface mount on vehicle body with flange.
- Snap-on mounting flange design with slick aesthetic.
- Meets SAE class 1 regardless of mounting orientation.
- No external flasher for easy and versatile installation.
- Built-in 12 selectable Flash Patterns.
- Multi-Voltage Input 12~24VDC.
- Multi-units synchronization in simultaneous or alternating flash.
- Reverse polarity protection.
- ECE R10 EMC Compliance.

SPECIFICATIONS

Meets: SAE J595 Class 1 (R,A,B,W); CA13 Class B (R,B,A);
ECE R10; IPX7

Bulb: High-power LED x 3pcs

Warning Patterns: 12 Flash Patterns

Operating Voltage: 12~24VDC

Avg. Current: 0.24A @12VDC / 0.12A @24VDC
(varies with flash pattern)

Avg. Power: 2.82 Watts (varies with flash pattern)

Max. Current: 0.47A @12VDC / 0.24A @24VDC

Max. Power: 5.65 Watts

Wires: Red-Vcc : 20cm (24AWG)

Black-GND : 20cm (24AWG)


Yellow-Flash Patterns & Sync : 20cm (24AWG)

Fuse Recommended: 1A

Multi-Unit Synchronization: Over 15 units

Available in: RED, BLUE, AMBER, WHITE

DIMENSIONS

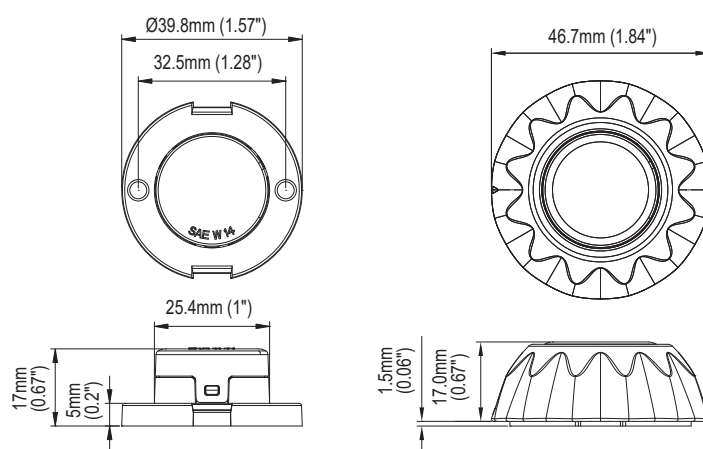

PART NO.

- 02060149 (AMBER) ■ 02060156 (BLUE)
- 02060224 (RED) ■ 02060231 (WHITE)

FLASH PATTERN

FP#	Flash Patterns		
1	Random	7	Quad [SAE]
2	Steady	8	Quint [SAE]
3	Single [SAE, CA13]	9	Ultra [SAE]
4	Mega	10	Single-Quad
5	Double [SAE]	11	Single H/L
6	Triple [SAE]	12	Single-Triple-Quint

Mounting Brackets

02060262

(L-BRACKET)

02060132

(BEZEL, CHROME)

02060248

(BEZEL, BLACK)

02060255

(BEZEL, WHITE)

