


LP3 LED PAD

3-LED LIGHT HEAD (Surface Mount)

12~24VDC



FEATURES

- 6.6mm (0.26") Super low-profile thickness for discreet mounting.
- Self-Adhesive backing for quick simple mounting.
- SAE Class 1 high power output.
- Multi-Voltage Input 12~24VDC.
- Built-in 12 selectable flash patterns.
- Long life LEDs rated to 100,000 hours of operation.
- Non-volatile memory recalls last flash pattern used at power up.
- Multi-units synchronization in simultaneous or alternating flash.
- Reverse polarity protection.
- Weatherproof and vibration resistant design for external or internal use.
- Aluminium base for efficient heat dissipation and maximum durability.

SPECIFICATIONS

Compliance: SAE J595 Class1 (A,B,R,W), CA13 (A,B,R), ECE R10, IPX8

LED Element: High-power LED x 3pcs

No. of Warning Patterns: 12

Operating Voltage: 12~24VDC

Avg. Current: 0.27A @12VDC / 0.14A @24VDC
(varies with flash pattern)

Max. Current: 0.54A @12VDC / 0.27A @24VDC

Avg. Power: 3.25 Watts (varies with flash pattern)

Max. Power: 6.5 Watts

Wires: WhiteVcc : 20cm (24AWG)

Black-GND : 20cm (24AWG)

Brown-Flash Patterns & Sync : 20cm (24AWG)

Fuse Rating: 1A

Synchronization: 15 units


Storage Temp. (°C): -40° ~ +75°

Working Temp. (°C): -30° ~ +65°

LED Colour: AMBER, BLUE, RED, WHITE, GREEN

Lens Colour: Clear

DIMENSIONS

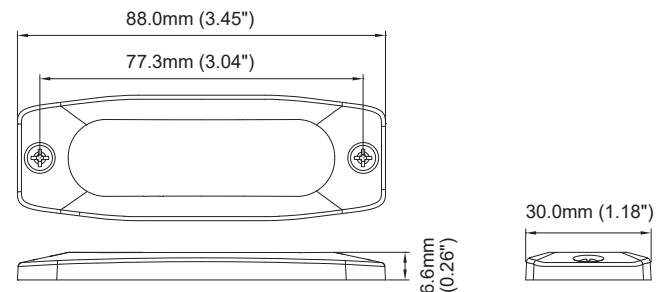

PART No.

02130071 (Amber)

02130088 (Blue)

02130095 (Red)

02130101 (White)

02130194 (Green)

FLASH PATTERN

FP#	Flash Patterns			
1	Random	7	Quad	[SAE]
2	Steady	8	Quint	[SAE]
3	Single [SAE] [CA13]	9	8 Flash	[SAE]
4	Mega	10	Single-Quad	
5	Double [SAE]	11	Single H/L	
6	Triple [SAE]	12	Single-Triple-Quint	

ACCESSORIES:

99-M043M00-000

L-BRACKET SINGLE HEAD

