

# TORRENT

12 or 24 VDC

## ECE R65 LED LIGHTBAR



### FEATURES

- New improved Xtreme Optic with ECE R65 Class 2 certified output.
- Integrated Take-down Light and Alley Light options.
- Tough solid Aluminium body for best durability and heat dissipation.
- Programmable flash patterns, with optional Traffic Arrow and Stop/Tail/Turn function.
- Highly customizable software.
- ECE R10 EMC Compliance.
- Reverse polarity protection.

### MOUNTING OPTIONS

**99-A006M00-000**  
Adjustable Feet Type B

**99-A006M01-000**  
Left & Right Lighthouse Brackets Only

**99-A006M02-000**  
Front & Rear Lighthouse Brackets Only



**99-LLEGM01-000**  
Standard Bolt Mount Brackets

**99-LTRTM00-000**  
Adjustable Bolt Mount Brackets



**99-LTRTM01-000**  
Flat Surface Mount Brackets-Narrow

**99-LTRTM04-000**  
Flat Surface Mount Brackets-Wide



### SPECIFICATIONS

**Compliance:** ECE R65 (TB2, TA2); ECE R10  
SAE Class 1, CA 13

**Flash Patterns:**

- 3 Warning Mode w/ 14 selectable Flash Pattern Sets
- 21 Programmable Lighthouse Patterns
- 11 Traffic advisor Patterns

**Operating Voltage:** 12VDC or 24VDC

**Ave. Current & Max Current:**

Model	Ave. Current (varies with flash pattern)		Max Current	
	12.8V	25.6V	12.8V	25.6V
30"	9.6A	4.5A	19.2A	8.9A
35"	10.3A	4.8A	20.5A	9.5A
40"	10.9A	5.1A	21.8A	10.1A
44"	11.6A	5.4A	23.1A	10.8A
49"	12.2A	5.7A	24.3A	11.4A
54"	12.8A	6.1A	25.6A	12.1A
59"	13.5A	6.4A	26.9A	12.7A

**Cable Length:**

**Power Cable:** 18 feet (5.55m) / 14AWG x 4 wires

**Function Cable:** 18.8 feet (5.75m) / 22AWG x 16 wires

**Storage Temperature:** -40°C to +75°C

**Operating Temperature:** -30°C to +65°C


**Fuse Rating:** 40A @12VDC

20A @24VDC

**LED Colour:** Amber, Blue, Red

**Lens Colour:** Amber, Blue, Red, Clear

## DIMENSIONS

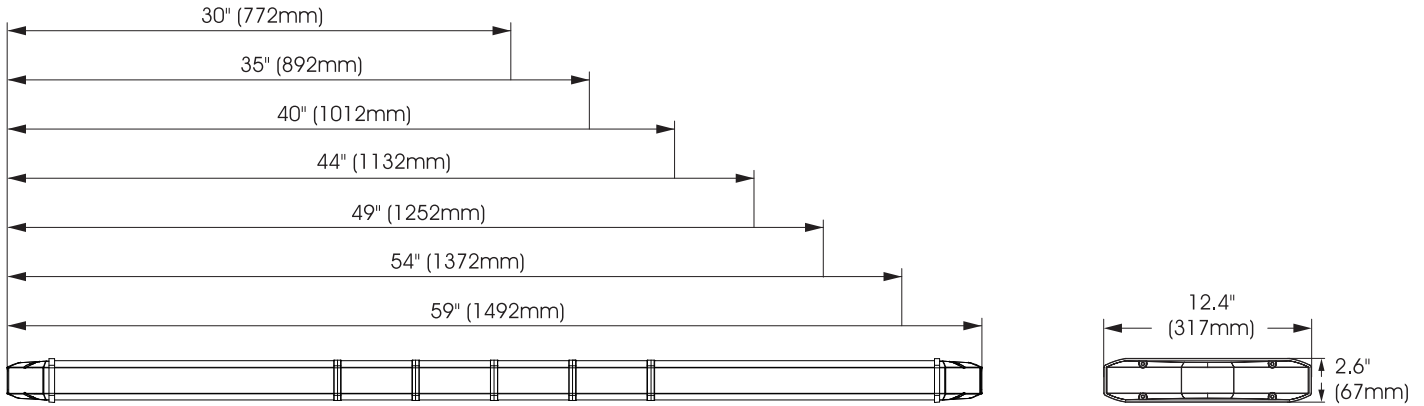

## LAYOUT

