


# SRP-MS6

## Dual MS6 RegPlate Warning System

Now available in  
Tinted Lens!



### FEATURES

- Pre-assembled Dual MS6 RegPlate System for Euro style reg plates.
- Certified ECE R65 Class 2 (XA2, XB2) high performance. Documentation available upon request.
- Smoked lens makes your Dual MS6 RegPlate System less conspicuous for blue "unmarked" application of law enforcement vehicles.
- Flexible rubber body fits most vehicle surface.
- 3 meter cable for easy wiring installation.
- Synchronized flash simultaneously, alternately or in unique criss-cross split flash.
- Reverse polarity protection.
- Weatherproof and vibration resistant designed for external use.
- Solid aluminum housing for efficient heat dissipation and maximum durability.
- Meets ECE R65 Class 2 (XR2) standard. Certification will be applied upon request.

### SPECIFICATIONS

**Compliance:** ECE R65 (XA2, XB2) / Clear Lens;  
ECE R65 (XA1, XB1) / Tinted Lens;  
ECE R10

**LED Element:** High intensity LED x 6 per lighthouse (total 12 LEDs)

**No. of Warning Patterns:** 31

**Operating Voltage:** 12~24VDC

**Avg. Current:** 1.2A@12VDC / 0.6A@24VDC  
(varies with flash pattern)

**Max. Current:** 2.4A@12VDC / 1.2A@24VDC

**Avg. Power** (varies with flash pattern): 14.4W

**Max. Power:** 28.8W

**Wires:** Red-Vcc : 20AWG  
Black-GND : 20AWG  
Green-Flash Patterns & Sync (HEAD1): 20AWG  
Yellow-Flash Patterns & Sync (HEAD2): 20AWG  
White-Low Power : 20AWG

**Cable Length:** 3000mm

**Fuse Rating:** 3A

**Synchronization:** Up to 15 lighthoods


**Storage Temp. (°C):** -40° ~ +75°

**Working Temp. (°C):** -20° ~ +60°

**LED Colour:** Amber, Blue

**Lens Colour:** Clear, Tinted

### DIMENSIONS

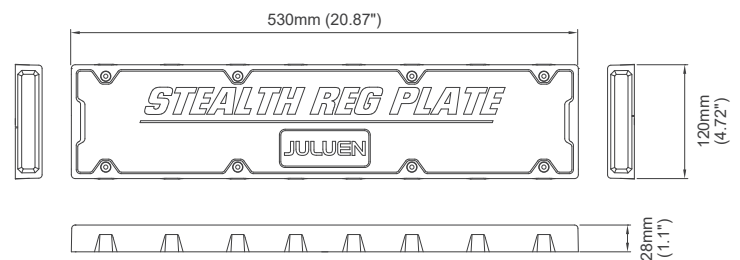

### PART No.

**R65 Class 2 Compliance**

- **02040820** (Amber LED)
- **02040837** (Blue LED)

**R65 Class 1 Compliance (Tinted Lens)**

- **02040936** (Blue LED)

### FLASH PATTERNS

Flash Patterns					
0	Quad		(split)	16	Single H/L
1	Double	[R65]		17	Single-Triple-Quint
2	Single	[2Hz]		18	Half-Steady-Half-Double (split)
3	Triple	[2Hz]		19	Single (split)
4	Quad	[2Hz]		20	Double (split)
5	Random			21	Triple (split)
6	Steady / Cruise			22	Quad (split)
7	Single	[SAE/CA13]		23	Quint (split)
8	Double	[SAE]		24	Mega (split)
9	Triple	[SAE]		25	Giga (split)
10	Quad	[SAE]		26	Ultra (split)
11	Quint	[SAE]		27	Single-Quad (split)
12	Mega			28	Single H/L (split)
13	Giga			29	Single-Triple-Quint (split)
14	Ultra	[SAE]		30	Steady-Dim*
15	Single-Quad				

(split) = criss-cross split flash

\* Use for compatible external flasher only.

