

3LED WARNING LIGHTHEAD

WIRING

To Chassis Ground:**BLACK**

To +VDC for Double [R65] (fuse @ 1A):**RED**


For Cruise Mode:**YELLOW**

Apply +VDC to **YELLOW** wire while **RED** wire is activated.

For Synchronization:**YELLOW**

Connect **YELLOW** wires of all lightheades together for synchronization.

(All lightheades should be set to the same Flash Pattern)

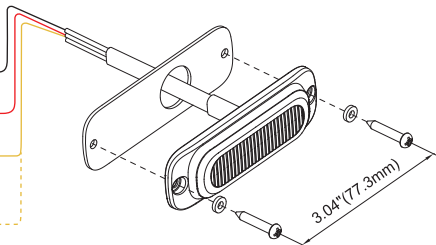

OPERATION

For Simultaneous or Alternating Synchronization:

1. Apply **Ground** to **YELLOW** wire, then apply **+VDC** to **RED** to enter *SETTING MODE*. Remove **YELLOW** wire from **Ground**, and the lighthead will display its current Group in short flashes:
 - Single flash = Group 1
 - Double flash = Group 2
2. Momentarily apply **YELLOW** wire to **+VDC** for less than 3 seconds to change to the desired Group:
 - Lightheades of the same Group will flash together.
 - Lightheades of two different Groups will flash alternately.
3. Save and exit *SETTING MODE* by disconnecting all power.