

MICRO-BAR-EXDTM

12~24VDC

Dual Colour 



FEATURES

- Powerful output meets ECE R65 Class2 for Blue colour.
- Equipped with Ambient Light Sensor: detect ambient light and automatically activate or deactivate the Low-Power operation.
- Each unit comes with 6 lighthead (12 LEDs/head).
- Non-volatile memory recalls last flash pattern used at power up.
- Available with rubber-coated magnetic mounting .
- Weatherproof and vibration resistant design for internal or external use.
- Reverse polarity protection.
- Multi-unit synchronization in simultaneous or alternating flash.

SPECIFICATIONS

Compliance: ECE R65 (TB2, TA1); ECE R10; SAE J845 Class1

LED Elements: High Power LED x 72 pcs

No. of Warning Patterns: 26

Operating Voltage: 12~24 VDC

Avg. Current: 3A @12VDC / 1.5A @24VDC
(varies with flash pattern)

Max. Current: 6A @12VDC / 3A @24VDC

Avg. Power: 36W (varies with flash pattern)

Max. Power: 72W

Magnetic Mount Wires: Dual button cigar-plug: 300cm




Fuse Rating: 9A

Synchronization: Up to 15 units

LED Colour: Amber, Blue

Lens Colour: Clear

DIMENSIONS

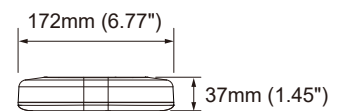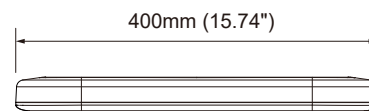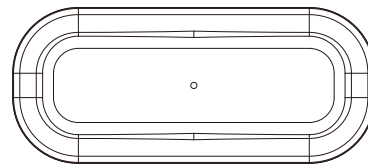

FLASH PATTERN

FP#	Flash Pattern	
1	Double	[2Hz]

* For other flash patterns, please contact your sales representatives.

PART NO.

- **06250065** (Amber & Blue)