

RX4 Reactor

4 LED Warning Lighthouse

Single Color



FEATURES

- Small footprint and compact design suitable for installation in tight or limited space.
- Extremely lightweight – Only 23 grams.
- ECE R65 Class 1 homologated light output.
- Screwless design - 3M adhesive tape for quick installation.
- Multi-unit synchronization in simultaneous or alternating flash.
- Weatherproof to IPX7, IPX9K and vibration resistant design for external use.

SPECIFICATIONS

Compliance: R65 Class 1(XA1/XB1/XR1), SAE J595 Class 1, CA13, R10, IPX7, IPX9K

LED Element: High-power LED x 4 pcs

No. of Warning Patterns: 18

Operating Voltage: 12~24VDC

Avg. Current: 0.375A @12VDC / 0.188A@24VDC

Max. Current: 0.75A @12VDC / 0.375A@24VDC

Avg. Power: 4.5W

Max. Power: 9W

Wires: Black - GND (20AWG)

Red - Warning Mode (20AWG)

Yellow - Flash Pattern & Sync (20AWG)

Wires Length: 26.5cm

Fuse Rating: 1A

Synchronization: up to 20 units

LED Colour: Amber, Blue, Red, Green, White


Lens Colour: Clear

Storage Temp.: -40°C to +75°C

Working Temp.: -40°C to +65°C



DIMENSIONS

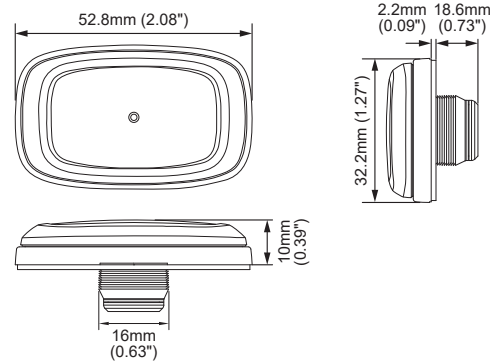

FLASH PATTERN

FP#	Flash Pattern			
1	Double	[2Hz]	11	Quint [SAE]
2	Single	[2Hz]	12	Mega
3	Triple	[2Hz]	13	Giga
4	Quad	[2Hz]	14	Ultra [SAE]
5	Random		15	Single-Quad
6	Steady EF*		16	Single H/L
7	Single	[SAE/CA13]	17	Single-Triple-Quint
8	Double	[SAE]	18	Steady Scene
9	Triple	[SAE]		
10	Quad	[SAE]		

* For use with external flash controller.

PART NO.

- **02240091** (Amber)
- **02240114** (Blue)
- **02240121** (Red)
- **02240138** (White)

ACCESSORIES

99-M082X00-000

(Double Sided Tape, 100pcs/pack)

