


OF01

Octa-Fit Lighthead

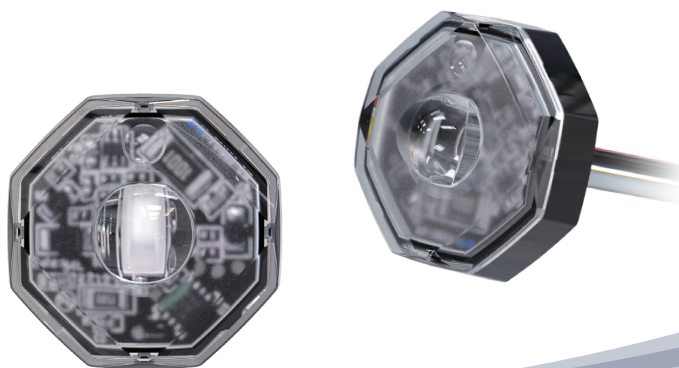

FEATURES

- 4 units provide a directional warning signal approved to ECE R65 Class 1 Category X (XA1, XB1, XR1).
- Small-size lighthead for installation in side mirrors, tailgates, boot lids, or door panels. Perfect product for mounting in unmarked/undercover vehicles to facilitate covert use.
- "OFF Override" wire allows turn signal to override warning.
- Self-contained flasher; no external flasher required.
- Multi-Voltage Input 12~24VDC.
- Multi-units synchronisation in simultaneous or alternating flash.
- Reverse polarity protection.

SPECIFICATIONS

Compliance: ECE R65 (XA1, XB1, XR1); ECE R10

IP Rating: IP67, IP69K

LED Element: High-power LED x 1 pc

No. of Warning Patterns: 9

Operating Voltage: 10~30VDC

Avg. Current: 0.5A @12VDC / 0.25A @24VDC
(varies with flash pattern)

Max. Current: 1A @12VDC / 0.5A @24VDC

Avg. Power: 6 Watts (varies with flash pattern)

Max. Power: 12 Watts

Wire: Red - Positive (+VE): 0.25mm² (24AWG)
Black - Negative (-VE): 0.25mm² (24AWG)
White - Disable Warning: 0.25mm² (24AWG)
Yellow - Flash Patterns & Sync: 0.25mm² (24AWG)
Wire Length: 55cm

Fuse Rating: 2A

Synchronisation: Up to 20 units


LED Colour: Amber, Blue, Red, White

Lens Colour: Clear

Storage Temp.: -40°C to +75°C

Operating Temp.: -40°C to +65°C

DIMENSIONS

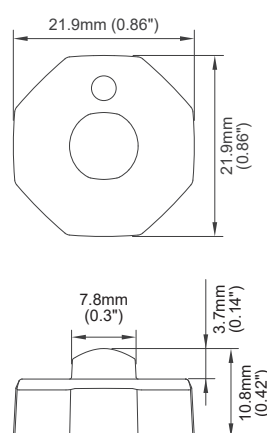

FLASH PATTERNS

FLASH PATTERNS				
1	Double	[R65]*	6	Steady EF**
2	Single	[2Hz]	7	Single-Quad
3	Triple	[2Hz]	8	Single H/L
4	Quad	[2Hz]	9	Single-Triple-Quint
5	Random			

* Actual approval will be based on the model ordered.

** For use with external flasher controller.

PART NO.

■ **F019- 0003x-000** (ECE R10, 2PCS/BOX)

■ **F019- 1103x-000** (ECE R65, 4PCS/BOX)

Replace **x** for:

A = Amber

B = Blue

R = Red

W = White

EAN NO.

■ **02060743** (2 units - Amber) ■ **02060750** (4 units - Amber)

■ **02060712** (2 units - Blue) ■ **02060767** (4 units - Blue)


■ **02060729** (2 units - Red) ■ **02060774** (4 units - Red)

■ **02060736** (2 units - White)

APPROVED MOUNTING POSITION

The lighthead must be set up in a set of four units to meet ECE R65 Cat. X. (Amber, Blue, Red)

Follow the diagram and position the lighthead within the maximum distance apart to fulfill the approval requirement.

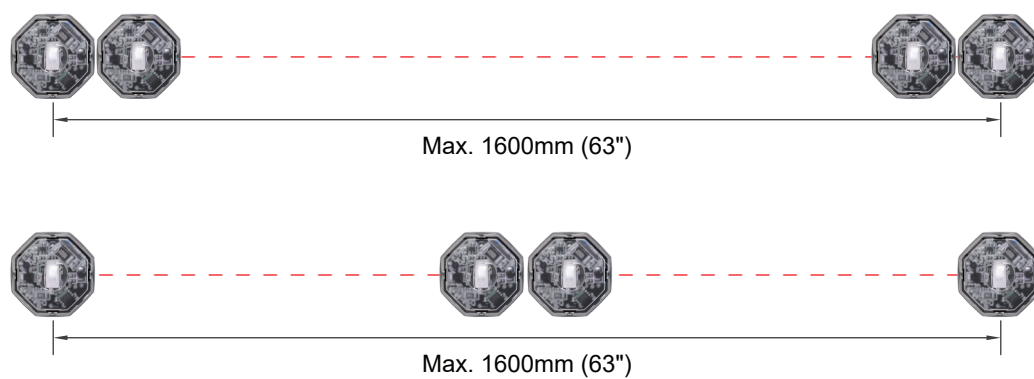

Application Examples

