

ID26 Identification Lighthouse

12-LED Surface Mount

12~24VDC



Dual Memory Capability



Wide view

FEATURES

- Dual Memory capability for cross function or cross state applications.
- Extra steady on functions for vehicle identification or illumination.
- Memory override for instant emergency use.
- Wrap around side optic for wider visibility.
- Low profile for discreet mounting.
- Multiple units are synchronizable and can flash simultaneously or alternately.
- Reverse polarity protection.
- Weatherproof and vibration resistant design.
- Aluminium base for heat dissipation.

SPECIFICATIONS

Compliance: SAE J595 Class 1, SAE J845 Class1, CA Title 13, ECE R65 (XA1, XB1), ECE R10

LED Elements: High-power LED x 12pcs

No. of Warning Patterns: 15 Flash Patterns (w/ 8 Modes per FP)

Operating Voltage: 12~24VDC

Avg. Current: 0.88A @12VDC / 0.44A @24VDC (varies with flash pattern)

Max. Current: 1.75A @12VDC / 0.88A @24VDC

Avg. Power: 10.5Watts (varies with flash pattern)

Max. Power: 21Watts

Wires: Red-Vcc : 25cm (20AWG)
White-Vcc : 25cm (20AWG)
Black-GND : 25cm (20AWG)

Yellow-Flash Patterns & Sync : 25cm (20AWG)

Fuse Rating: 3A

Synchronization: 15 units


LED Colour: AMBER, BLUE, RED, WHITE

Lens Colour: Clear

Storage Temp. (°C): -40°C to +75°C

Working Temp. (°C): -30°C to +65°C

DIMENSIONS

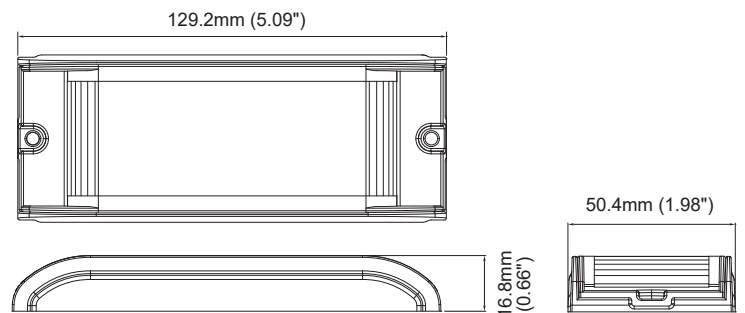

PART NO.

- 02110301 (ECE R65 XA1)
- 021110400 (ECE R65 XB1)
- M041-0113K-000 (SAE AMBER/WHITE)
- M041-0113Q-000 (SAE RED/BLUE)
- M041-0113R-000 (SAE RED)
- M041-0113T-000 (SAE BLUE/WHITE)
- M041-0113U-000 (SAE RED/WHITE)
- M041-0113W-000 (SAE WHITE)
- M041-0113D-000 (SAE BLUE/AMBER)
- M041-0113B-000 (SAE BLUE)
- M041-0113A-000 (SAE AMBER)

FLASH PATTERN

| FP# | Flash Patterns | | | | |
|-----|----------------|-------|----|-------------------|-------|
| 1 | Double | [R65] | 9 | Quint | [SAE] |
| 2 | Single (2Hz) | | 10 | Mega | |
| 3 | Triple (2Hz) | | 11 | Ultra | [SAE] |
| 4 | Quad (2Hz) | | 12 | Single-Quad | |
| 5 | Random | | 13 | Single H/L | |
| 6 | Single | [SAE] | 14 | Steady & Warning* | |
| 7 | Double | [SAE] | 15 | Full Steady** | |
| 8 | Quad | [SAE] | | | |

Note:

Warning (FP#1~13) comes with 8 Modes.

*Steady & Warning (FP#14) comes with 8 Modes.

**Full Steady (FP#15) comes with 6 Modes.