

SL209 series

9 Inch Exterior Scene Light



FEATURES

- Curved design to maximise coverage with streamlined aesthetics.
- Over 1730 lumen output; Luminous intensity ≥ 820 lux at 1 metre.
- Certified ECE R10 and CISPR 25 Class 3.
- 12~24V wide range input.
- Reverse polarity protection.
- Available with black, white, yellow, or red base.
- Die-cast aluminium base for efficient heat dissipation and high LED durability.
- Weatherproof and vibration resistant design for external use.

SPECIFICATION

Compliance: ECE R10, CISPR 25 Class 3, IPX7

Nominal Voltage: 12~24VDC

Operating Voltage: 10~30VDC

Beam Type: Flood

LED Element: High Power LED x 6 pcs

Raw Lumen: 1730 lm

Effective Lumen: 1460 lm

Max. Current: 1.12A @12VDC / 0.56A @24VDC

Max. Power: 13.44 Watts

Wires: Red - + VE: 21cm 0.5mm² (20AWG)
Black - - VE: 21cm 0.5mm² (20AWG)

Fuse Rating: 1.5A

LED Colour: White (6000K)

Lens Colour: Clear


Storage Temp. (°C): -40° ~ +75°

Working Temp. (°C): -40° ~ +60°

Weight: 410g

Warranty: 5 years

DIMENSIONS

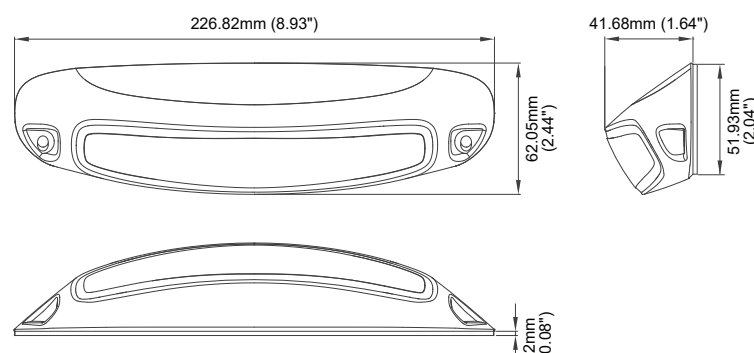

PART NO.

- 07040016 (W013-0103W-000) - SL209 Scene Light - Black
- 07040085 (W013-0113W-000) - SL209 Scene Light - White
- 07040153 (W013-0143W-000) - SL209 Scene Light - Red (RAL3000)
- 07040627 (W013-0133W-000) - SL209 Scene Light - Yellow

ILLUMINANCE PATTERN

